


Reflection from a mass at the boundary

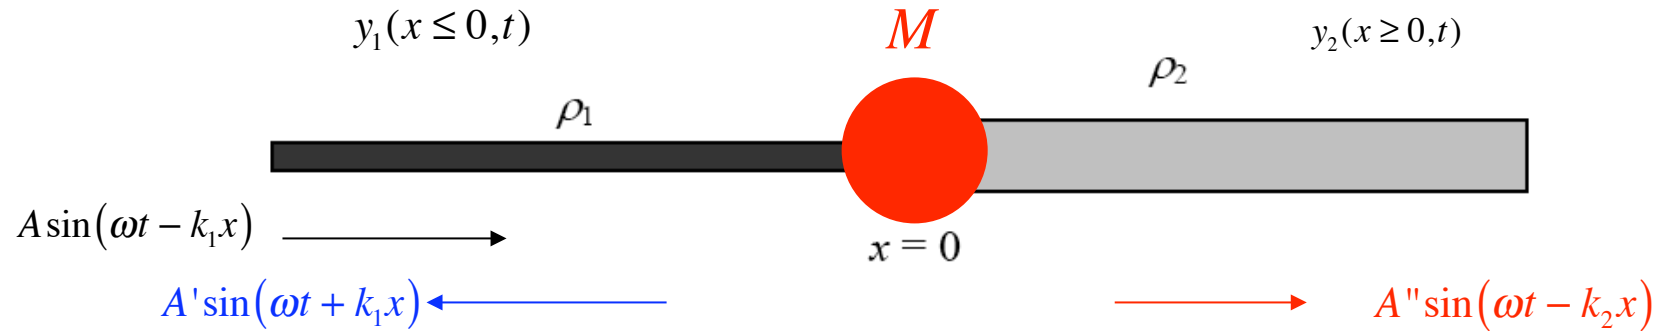


To keep track of phase changes easier to use complex exponentials

$$\frac{\partial^2 y}{\partial x^2} = \frac{1}{v^2} \frac{\partial^2 y}{\partial t^2} \quad y(x, t) = B e^{i(kx - \omega t)} \text{ is a solution}$$

$(y(x, t) = \text{Re}(B e^{i(kx - \omega t)}) \text{ or } \text{Im}(B e^{i(kx - \omega t)}) \text{ are also solutions})$

Reflection from a mass at the boundary

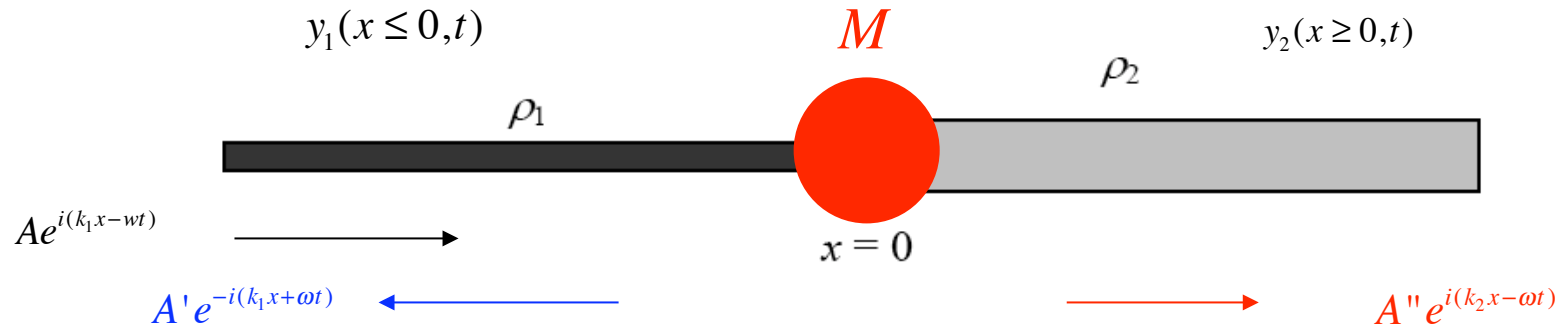

$$y_1(x, t) = Ae^{i(k_1x - \omega t)} + A'e^{-i(k_1x + \omega t)}$$

$$y_2(x, t) = A''e^{i(k_2x - \omega t)}$$


$$y_1(x = 0-, t) = y_2(x = 0+, t)$$

String continuous

$$A + A' = A''$$

$$-T \frac{\partial y_1}{\partial x} \Big|_{x=0} + T \frac{\partial y_2}{\partial x} \Big|_{x=0} = M \frac{\partial^2 y_1}{\partial t^2} \Big|_{x=0} = M \frac{\partial^2 y_2}{\partial t^2} \Big|_{x=0}$$

Newton's 2nd law



$$-ik_1TA + ik_1TA' + ik_2TA'' = -\omega^2 M(A + A') = -\omega^2 MA'' \Rightarrow ik_1(A - A') = (ik_2 + \omega^2 M / T) A''$$

$$A + A' = A''$$

$$ik_1(A - A') = (ik_2 + \omega^2 M / T)A''$$

$$M = 0$$

$$r = \frac{A'}{A} = \frac{(k_1 - k_2)T + i\omega^2 M}{(k_1 + k_2)T - i\omega^2 M} = \text{Re}^{i\theta}$$

$$\frac{A'}{A} = \frac{k_1 - k_2}{k_1 + k_2}$$

$$t = \frac{A''}{A} = \frac{2k_1 T}{(k_1 + k_2)T - i\omega^2 M} = S e^{i\phi}$$

$$\frac{A''}{A} = \frac{2k_1}{k_1 + k_2}$$

$$k_1 < k_2 \quad (\rho_1 < \rho_2 \dagger):$$

$$R = \left[\frac{(k_1 - k_2)^2 T^2 + \omega^4 M^2}{(k_1 + k_2)^2 T^2 + \omega^4 M^2} \right]^{1/2}, \quad \theta = \tan^{-1} \left(\frac{\omega^2 M}{k_1 - k_2} \right) + \tan^{-1} \left(\frac{\omega^2 M}{k_1 + k_2} \right)$$

$$\theta = \pi$$

$$S = \left[\frac{4k_1^2 T^2}{(k_1 + k_2)^2 T^2 + \omega^4 M^2} \right]^{1/2}, \quad \phi = \tan^{-1} \left(\frac{\omega^2 M}{k_1 + k_2} \right)$$

$$\phi = 0$$

$$\dagger \quad k = \omega \sqrt{\frac{\rho}{T}}$$

$$A + A' = A''$$

$$ik_1(A - A') = (ik_2 + \omega^2 M / T)A''$$

$$r = \frac{A'}{A} = \frac{(k_1 - k_2)T + i\omega^2 M}{(k_1 + k_2)T - i\omega^2 M} = Re^{i\theta}$$

$$t = \frac{A''}{A} = \frac{2k_1 T}{(k_1 + k_2)T - i\omega^2 M} = Se^{i\phi}$$

$$R = \left[\frac{(k_1 - k_2)^2 T^2 + \omega^4 M^2}{(k_1 + k_2)^2 T^2 + \omega^4 M^2} \right], \quad \theta = \tan^{-1} \left(\frac{\omega^2 M / T}{k_1 - k_2} \right) + \tan^{-1} \left(\frac{\omega^2 M / T}{k_1 + k_2} \right)$$


$$S = \left[\frac{4k_1^2 T^2}{(k_1 + k_2)^2 T^2 + \omega^4 M^2} \right], \quad \phi = \tan^{-1} \left(\frac{\omega^2 M / T}{k_1 + k_2} \right)$$

$$P = \frac{1}{2} T \omega k A^2$$

Power flux

$$|r|^2 + \frac{k_2}{k_1} |t|^2 = R^2 + \frac{k_2}{k_1} S^2 = 1$$

Conservation of energy

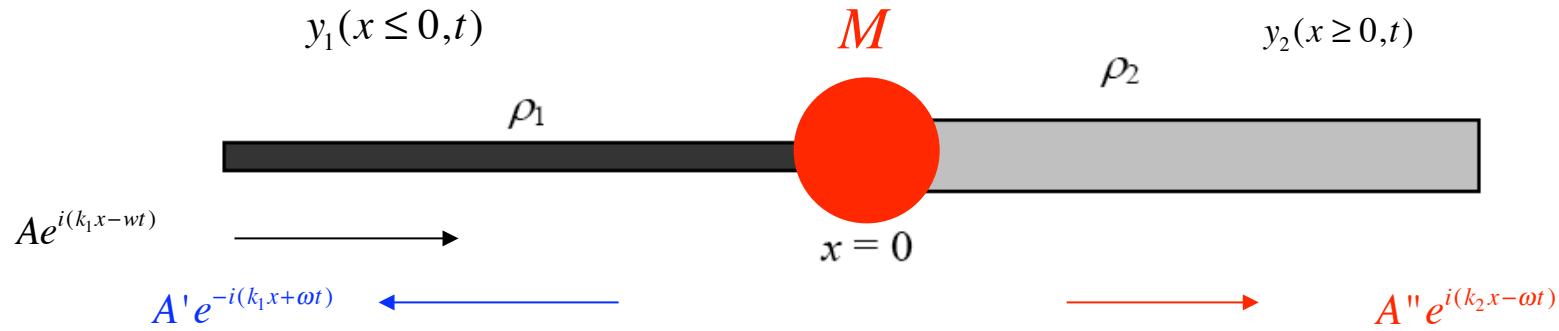

$$y_1(x, t) = Ae^{i(k_1x - \omega t)} + AR e^{-i(k_1x + \omega t - \theta)}$$

$$\frac{A'}{A} = R e^{i\theta}, \quad \frac{A''}{A} = S e^{i\phi}$$

$$y_2(x, t) = AS e^{i(k_2x - \omega t + \phi)}$$

Real solutions (take A real for simplicity)

$$\text{Re}(y_1) = A \cos(k_1x - \omega t) + AR \cos(k_1x + \omega t - \theta)$$

$$\text{Re}(y_2) = AS \cos(k_2x - \omega t + \phi)$$

Phase shifts

$$|r|^2 + \frac{k_2}{k_1} |t|^2 = R^2 + \frac{k_2}{k_1} S^2 = 1$$

Conservation of energy

Impedance

Electrical impedance – a measure of opposition to a time varying electric current

$$Z = R + i\omega L + \frac{1}{i\omega C} \quad \left(\tilde{V} = \tilde{I}Z = \tilde{I}R + L \frac{\partial \tilde{I}}{\partial t} + \frac{1}{C} \int \tilde{I} dt, \quad \tilde{I} \propto e^{i\omega t} \right)$$

Mechanical impedance – a measure of opposition to motion of a structure subject to a force


$$F(\omega) = Z(\omega) v(\omega) \quad Z = \frac{F_y}{v_y} = \frac{-T \frac{\partial y}{\partial x}}{\frac{\partial y}{\partial t}}$$

$$y(x,t) = A \sin(kx \mp \omega t) \Rightarrow Z_{\pm} = \pm \frac{Tk}{\omega} = \pm \frac{T}{v}$$

Electromagnetic impedance

Acoustic impedance

Impedance

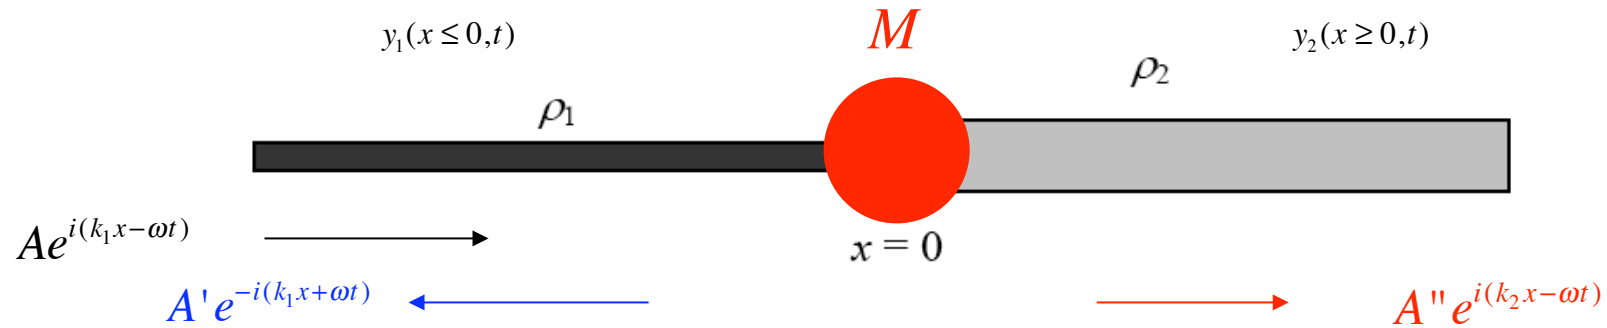

$$-T \frac{\partial y_1}{\partial x} \Big|_{x=0} + T \frac{\partial y_2}{\partial x} \Big|_{x=0} = M \frac{\partial^2 y_1}{\partial t^2} \Big|_{x=0} = M \frac{\partial^2 y_2}{\partial t^2} \Big|_{x=0} \quad \text{Newton's 2nd law}$$

$$Z_{1\mp} \frac{\partial y_1}{\partial t} \Big|_{x=0} - Z_{2-} \frac{\partial y_2}{\partial t} \Big|_{x=0} = M \frac{\partial^2 y_1}{\partial t^2} \Big|_{x=0} = M \frac{\partial^2 y_2}{\partial t^2} \Big|_{x=0} \quad -T \frac{\partial y}{\partial x} = \frac{\partial y}{\partial t} Z_{\mp}$$


$$Z_{1\mp} v_1 - Z_{2-} v_2 = M \frac{\partial v_{i=1,2}}{\partial t} = Z_m v_1 = Z_m v_2 \quad Z = \frac{T}{c}, \quad v = \frac{\partial y}{\partial t}$$

Impedance

$$Z_m = -i\omega M$$

Impedance of mass

Impedance

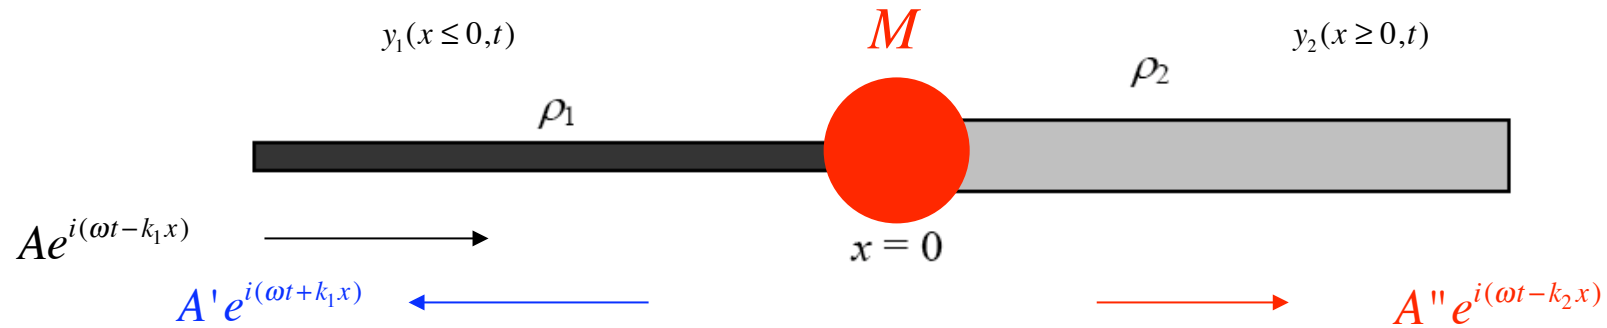

$$-T \frac{\partial y_1}{\partial x} \Big|_{x=0} + T \frac{\partial y_2}{\partial x} \Big|_{x=0} = M \frac{\partial^2 y_1}{\partial t^2} \Big|_{x=0} = M \frac{\partial^2 y_2}{\partial t^2} \Big|_{x=0} \quad \text{Newton's 2nd law}$$


$$Z_{1\mp} \frac{\partial y_1}{\partial t} \Big|_{x=0} - Z_{2-} \frac{\partial y_2}{\partial t} \Big|_{x=0} = M \frac{\partial^2 y_1}{\partial t^2} \Big|_{x=0} = M \frac{\partial^2 y_2}{\partial t^2} \Big|_{x=0} \quad -T \frac{\partial y}{\partial x} = \frac{\partial y}{\partial t} Z_{\mp}$$

$$Z_{1\mp} v_1 - Z_{2-} v_2 = M \frac{\partial v_{i=1,2}}{\partial t} = Z_m v_1 = Z_m v_2 \quad r = \frac{Z_1 - (Z_2 + Z_m)}{Z_1 + Z_2 + Z_m}$$

$$Z_{1-}(A - A') - Z_{2-} A'' = Z_m (A + A') = Z_m A''$$

$$t = \frac{2Z_1}{Z_1 + Z_2 + Z_m}$$

Impedance

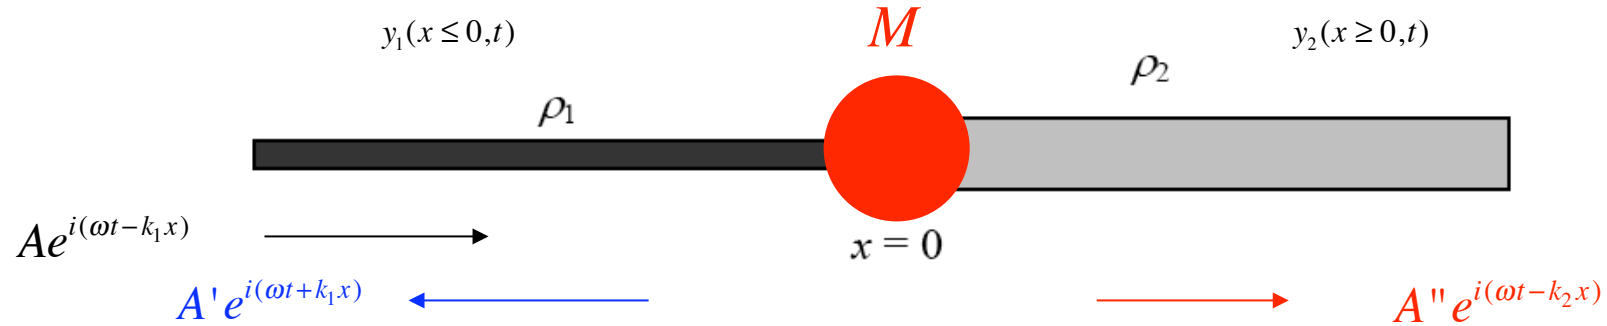

$$-T \frac{\partial y_1}{\partial x} \Big|_{x=0} + T \frac{\partial y_2}{\partial x} \Big|_{x=0} = M \frac{\partial^2 y_1}{\partial t^2} \Big|_{x=0} = M \frac{\partial^2 y_2}{\partial t^2} \Big|_{x=0}$$

Newton's 2nd law

$$Z_{1\mp} \frac{\partial y_1}{\partial t} \Big|_{x=0} - Z_{2-} \frac{\partial y_2}{\partial t} \Big|_{x=0} = M \frac{\partial^2 y_1}{\partial t^2} \Big|_{x=0} = M \frac{\partial^2 y_2}{\partial t^2} \Big|_{x=0}$$

$$-T \frac{\partial y}{\partial x} = \frac{\partial y}{\partial t} Z_{\mp}$$

$$Z_{1\mp} v_1 - Z_{2-} v_2 = M \frac{\partial v_{i=1,2}}{\partial t} = Z_m v_1 = Z_m v_2$$

$$r = \frac{Z_1 - (Z_2 + Z_m)}{Z_1 + Z_2 + Z_m} = \frac{(k_1 - k_2)T + i\omega^2 M}{(k_1 + k_2)T - i\omega^2 M} = \text{Re}^{i\theta}$$

$$Z_{1-}(A - A') - Z_{2-} A'' = Z_m (A + A') = Z_m A''$$

$$t = \frac{2Z_1}{Z_1 + Z_2 + Z_m} = \frac{2k_1 T}{(k_1 + k_2)T - i\omega^2 M} = S e^{i\phi}$$

Electromagnetic waves

Maxwell's equations (free space)

$$\nabla \times \nabla \times \vec{E} = -\nabla^2 \vec{E} + \nabla(\nabla \cdot \vec{E})$$

$$-\nabla \times \frac{\partial \vec{B}}{\partial t} = -\frac{\partial \nabla \times \vec{B}}{\partial t} = -\frac{1}{c^2} \frac{\partial^2 \vec{E}}{\partial t^2}$$

$$\nabla^2 \vec{E} = \frac{1}{c^2} \frac{\partial^2 \vec{E}}{\partial t^2}$$

EM plane wave $\vec{E} = \vec{E}(z)$

$$\frac{\partial^2 \vec{E}}{\partial z^2} = \frac{1}{c^2} \frac{\partial^2 \vec{E}}{\partial t^2}$$

$$\frac{\partial \vec{E}}{\partial z} = 0 \Rightarrow$$

$$E_z = 0$$

Transverse wave

$$\nabla \cdot \vec{E} = 0$$

$$\nabla \cdot \vec{B} = 0$$

$$\nabla \times \vec{E} = -\frac{\partial \vec{B}}{\partial t}$$

$$\nabla \times \vec{B} = \frac{1}{c^2} \frac{\partial \vec{E}}{\partial t}$$

Polarisation

$$E_x = A \sin(kx - \omega t)$$

$$E_y = B \sin(kx - \omega t + \phi)$$

A	B	ϕ	Polarisation state	
1	0	-	Linear	\rightarrow
0	1	-	Linear	\uparrow
1	1	0	Linear	\nearrow
1	1	π	Linear	\nwarrow
1	1	$\pi/2$	Circular	(LH)
1	1	$-\pi/2$	Circular	(RH)

